



USB – RS 485 Converter Cable

Fullduplex wiring – TX 120R & RX 120R Terminating Resistors

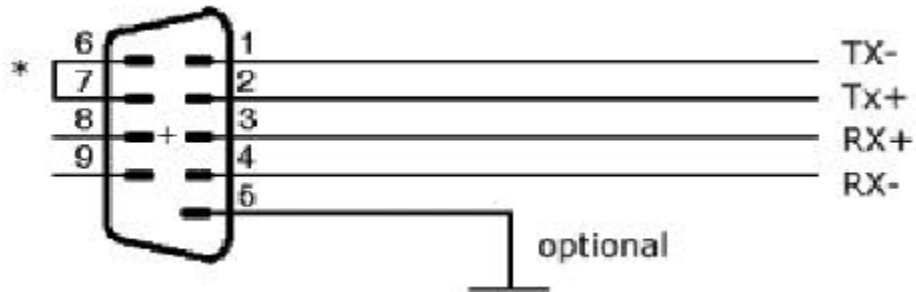

* Pin 6 to bridge Pin 7 - to activate 120R TX Terminating Resistor

Halfduplex wiring - RX/TX 120R Terminating Resistors - Echo_Off

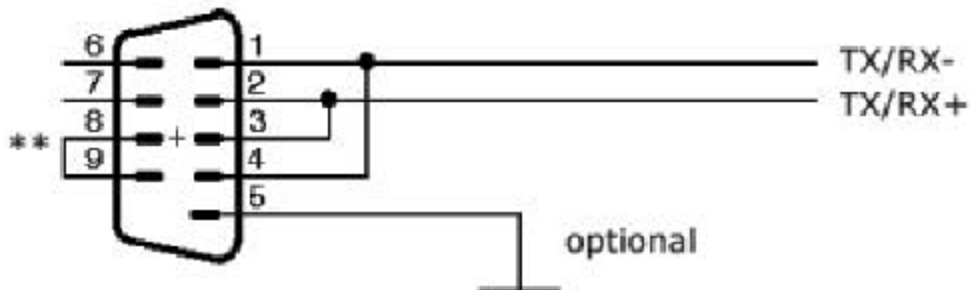

** Pin 8 to bridge Pin 9 – to activate Echo_Off